



**CARVING**  
ENDLESS SERIES

600X1200MM

*Artistic*  
Expression



**CREATIVITY IS**  
OUR **PASSION**

## About us

**ESPANA IMPEX** is a Limited Liability Partnership firm incorporated on 07 October 2020. It is registered at Registrar of Companies, Ahmedabad. Its total obligation of contribution is Rs. 100,000.

ESPANA IMPEX'S last financial year end date for which Statement of Accounts and Solvency were filed is N/A and as per records from Ministry of Corporate Affairs (MCA), date of last financial year end date for which Annual Return were filed is N/A.

**ESPANA IMPEX**  
**CUSTOMER CARE +91 95377 03114**

Address: **602, Empire Square, Opp. Sun Ora Ceramic,  
8-A National Highway,  
Morbi (Gujarat) India.**



# ANTHANI BIANCO



Size  
**600x1200mm**

Finish  
**Carving**

Random  
**04**

**ENDLESS**  
CARVING





# ANTHANI GREY



Size  
**600x1200mm**

Finish  
**Carving**

Random  
**04**

**ENDLESS**  
CARVING







# ARBASCATO



Size  
**600x1200mm**

Finish  
**Carving**

Random  
**04**


**ENDLESS**  
CARVING







# BEAUTY RED

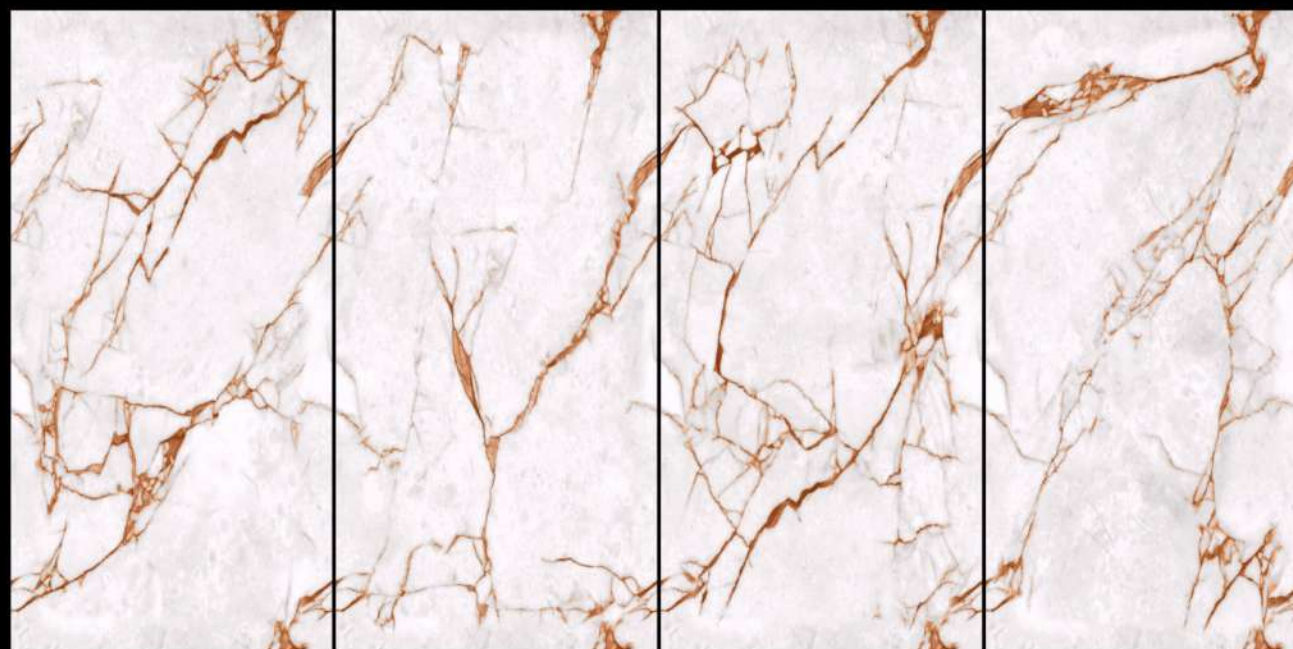

Size  
**600x1200mm**

Finish  
**Carving**

Random  
**05**



**ENDLESS**  
CARVING







# ELITE BEIGE

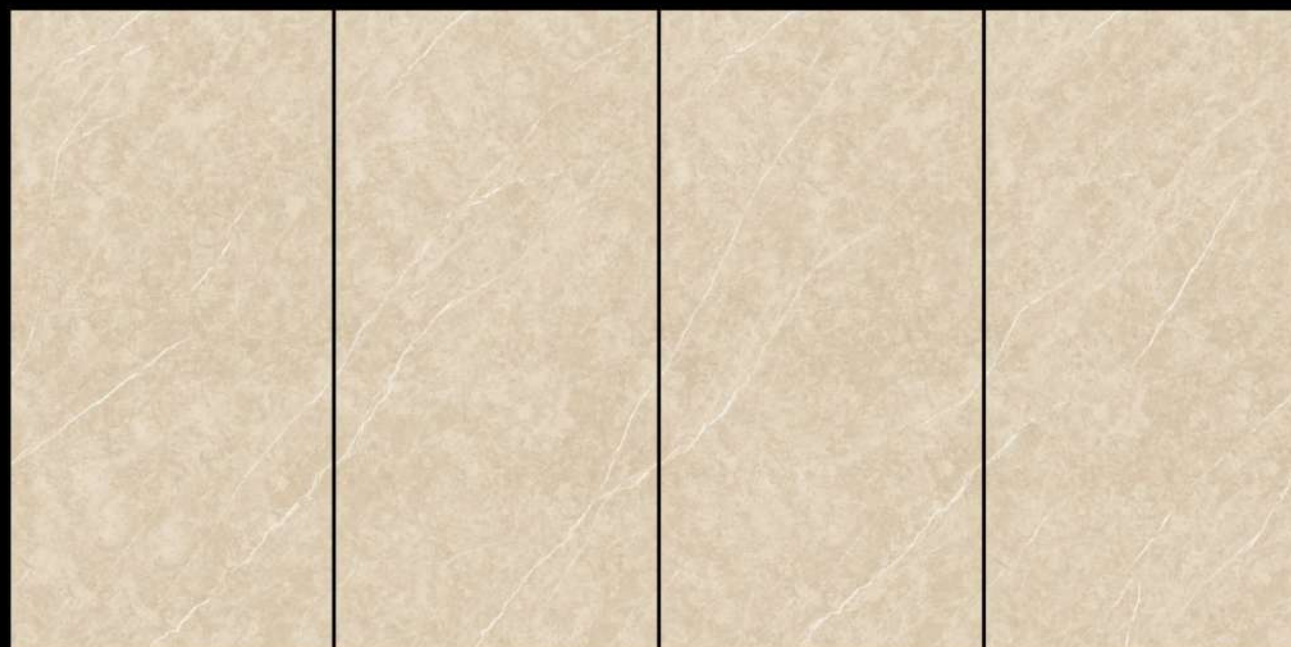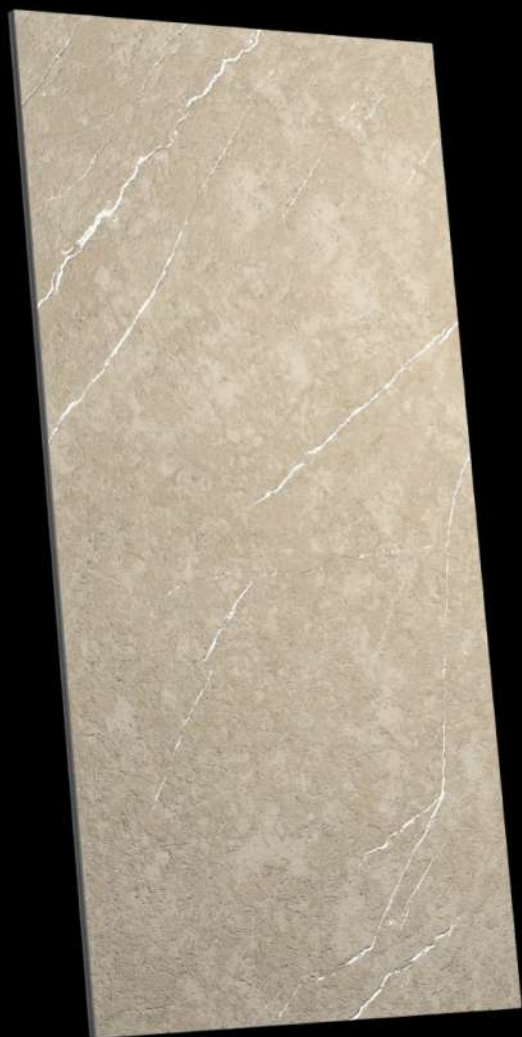

Size  
**600x1200mm**

Finish  
**Carving**

Random  
**04**


**ENDLESS**  
CARVING







**ELITE GREY**

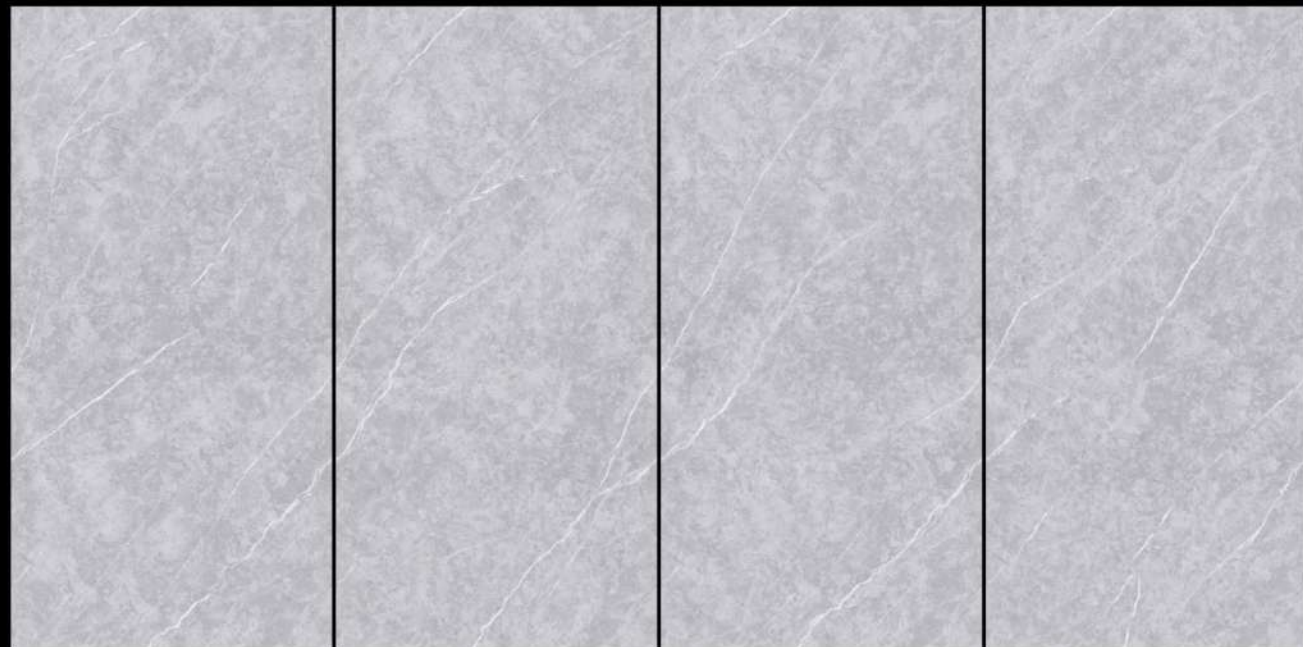

Size  
**600x1200mm**

Finish  
**Carving**

Random  
**04**

**ENDLESS**  
CARVING





# FENIX WHITE



Size  
**600x1200mm**

Finish  
**Carving**

Random  
**03**

**ENDLESS**  
CARVING





# FIRRO BIANCO



Size  
**600x1200mm**

Finish  
**Carving**

Random  
**05**

**ENDLESS**  
CARVING





# FIRRO CLASSIC



Size  
**600x1200mm**

Finish  
**Carving**

Random  
**05**

**ENDLESS**  
CARVING





# MARFIL PEARL



Size  
**600x1200mm**

Finish  
**Carving**

Random  
**05**

**ENDLESS**  
CARVING





# POLARIS SILVER



Size  
**600x1200mm**

Finish  
**Carving**

Random  
**03**

**ENDLESS**  
CARVING





# RIGATO BEIGE



Size  
**600x1200mm**

Finish  
**Carving**

Random  
**04**


**ENDLESS**  
CARVING







# RIGATO WHITE

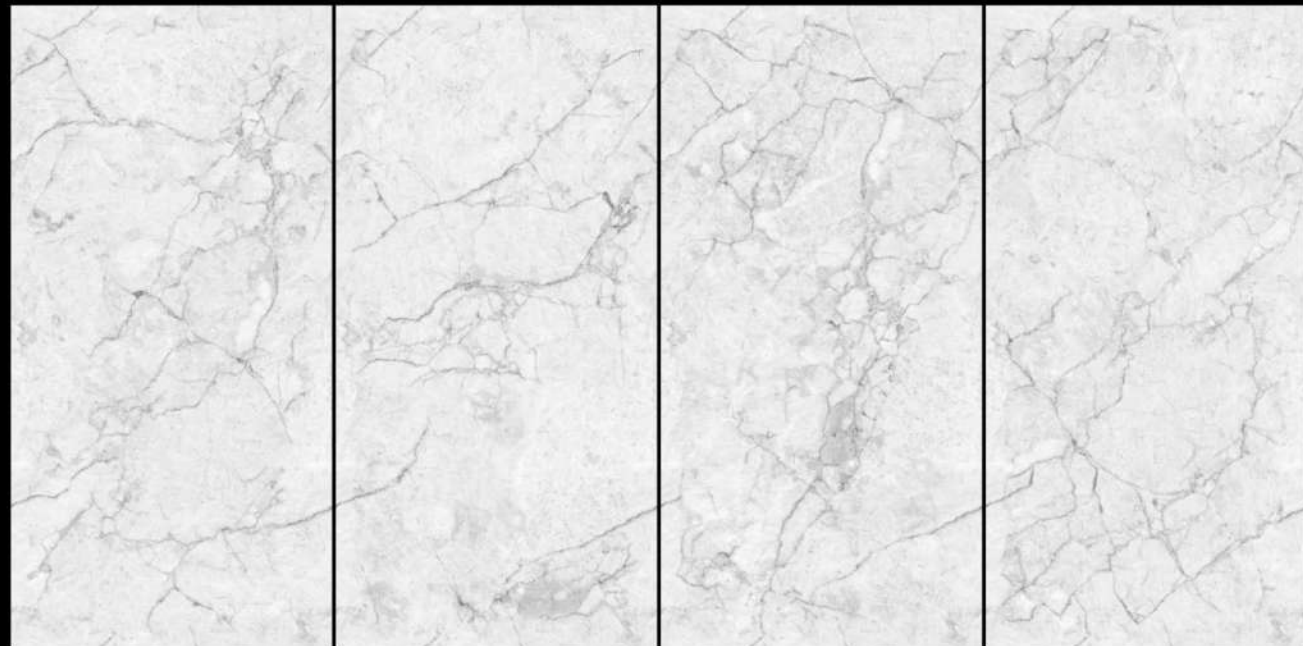

Size  
**600x1200mm**

Finish  
**Carving**

Random  
**04**

**ENDLESS**  
CARVING







# RIVER STONE BEIGE



Size  
**600x1200mm**

Finish  
**Carving**

Random  
**04**

**ENDLESS**  
CARVING







# RIVER STONE NETURAL



Size  
**600x1200mm**

Finish  
**Carving**

Random  
**04**

**ENDLESS**  
CARVING







# RIVER STONE WHITE



Size  
**600x1200mm**

Finish  
**Carving**


Random  
**04**

**ENDLESS**  
CARVING





# BELLATON WHITE

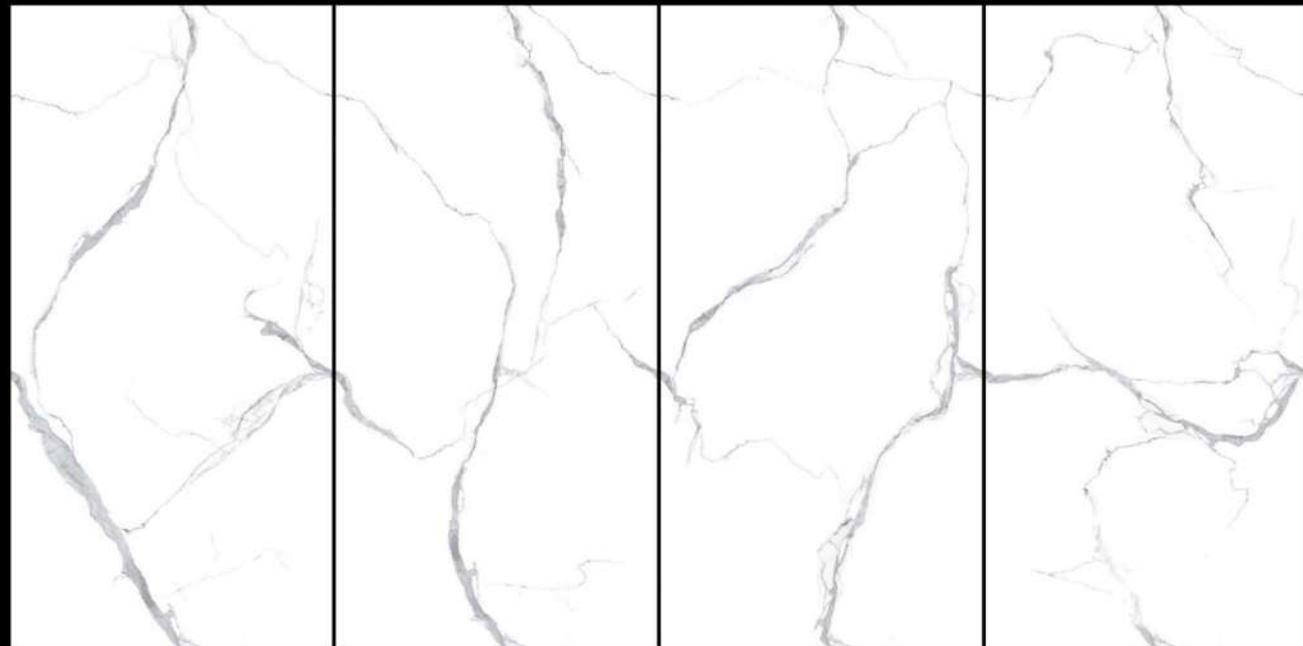

Size  
**600x1200mm**

Finish  
**Carving**

Random  
**04**

**ENDLESS**  
CARVING





# STATUARIO REMIX



Size  
**600x1200mm**

Finish  
**Carving**

Random  
**04**

**ENDLESS**  
CARVING





# SNOW BEIGE



Size  
**600x1200mm**

Finish  
**Carving**

Random  
**04**

**ENDLESS**  
CARVING





# STATUARIO ETHNIC



Size  
**600x1200mm**

Finish  
**Carving**

Random  
**05**

**ENDLESS**  
CARVING





# VELLYS CREMA



Size  
**600x1200mm**

Finish  
**Carving**

Random  
**04**

**ENDLESS**  
CARVING





# VESACE BEIGE



Size  
**600x1200mm**

Finish  
**Carving**

Random  
**04**

**ENDLESS**  
CARVING







# VESACE GREY



Size  
**600x1200mm**

Finish  
**Carving**

Random  
**04**

**ENDLESS**  
CARVING







# VICTORIA BEIGE



Size  
**600x1200mm**

Finish  
**Carving**

Random  
**06**

**ENDLESS**  
CARVING





# VICTORIA CLASSIC



Size  
**600x1200mm**

Finish  
**Carving**

Random  
**06**

**ENDLESS**  
CARVING





## GLAZED VITRIFIED TILES TECHNICAL DETAILS

| CHARACTERISTIC                              | STANDARD AS PER<br>ISO-13006/EN14411<br>GROUP Bla | MEAN VALUE OF<br>ESPANA  | TEST<br>METHOD |
|---------------------------------------------|---------------------------------------------------|--------------------------|----------------|
| <b>REGULATORY PROPERTIES</b>                |                                                   |                          |                |
| Deviation In Length & Width                 | ± 0.50%                                           | ± 0.10%                  | ISO-10545-2    |
| Deviation In Thickness                      | ± 5.00%                                           | ± 4.00%                  | ISO-10545-2    |
| Straightness Of Sides                       | ± 0.50%                                           | ± 0.10%                  | ISO-10545-2    |
| Rectangularity                              | ± 0.50%                                           | ± 0.10%                  | ISO-10545-2    |
| Surface Flatness                            | ± 0.50%                                           | ± 0.20%                  | ISO-10545-2    |
| Color Differences                           | Unaltered                                         | No Change                | ISO-10545-16   |
| Glossiness                                  | As per Mfg.                                       | Min. 90%                 | GLOSSOMETER    |
| <b>STRUCTURAL PROPERTIES</b>                |                                                   |                          |                |
| Water Absorption                            | < 0.50%                                           | < 0.05%                  | ISO-10545-3    |
| Apparent Density                            | > 2.00 g/cc                                       | > 2.10 g/cc              | DIN 51082      |
| <b>MASSIVE MECHANICAL PROPERTIES</b>        |                                                   |                          |                |
| Modulus of Rupture                          | Min. 35N/mm <sup>2</sup>                          | Min. 40N/mm <sup>2</sup> | ISO-10545-4    |
| Breaking Strength                           | Min. 1300 N                                       | Min. 2000 N              | ISO-10545-4    |
| Impact Resistance                           | As Per Mfg.                                       | Min. 0.55                | ISO-10545-5    |
| <b>SURFACE MECHANICAL PROPERTIES</b>        |                                                   |                          |                |
| Surface Abrasion Resistance                 | As Per Mfg.                                       | Min. Class-3             | ISO-10545-7    |
| Moh's Hardness                              | As Per Mfg.                                       | Min. 4                   | EN 101         |
| <b>THERMO HYDROMETRIC PROPERTIES</b>        |                                                   |                          |                |
| Frost Resistance                            | No Damage                                         | No Damage                | ISO-10545-12   |
| Thermal Shock Resistance                    | No Damage                                         | No Damage                | ISO-10545-9    |
| Moisture Expansion                          | Nil                                               | Nil                      | ISO-10545-10   |
| Thermal Expansion(COE)                      | Max 9.0x10 <sup>5</sup>                           | Max 6.5x10 <sup>5</sup>  | ISO-10545-8    |
| Crazing Resistance                          | As Per Mfg.                                       | Min. 10 Cycle            | ISO-10545-11   |
| <b>CHEMICAL PROPERTIES</b>                  |                                                   |                          |                |
| Chemical Resistance                         | No Damage                                         | No Damage                | ISO-10545-13   |
| Stain Resistance                            | Resistant                                         | Resistant                | ISO-10545-14   |
| <b>SAFETY PROPERTIES</b>                    |                                                   |                          |                |
| Slip Resistance                             | > 0.40                                            | > 0.40                   | ISO-10545-17   |
| Fire Resistance                             | As Per Mfg.                                       | Fireproof                | N. A.          |
| Lead & Cadmium given<br>off by glazed tiles | As Per Mfg.                                       | Does not yield Pb & Cd   | ISO-10545-15   |

Note: Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given, however, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.

## PACKING DETAILS

| Size        | Pcs. / Box | Coverage<br>Area / Box | Weight / Box |
|-------------|------------|------------------------|--------------|
| 600x1200 MM | 2          | 1.44 sq. mtr.          | 27.5 kg.     |



# ESPANA

Mfg. By:

**ESPANA IMPEX**

602, Empire Square, Opp. Sun Ora Ceramic,  
8-A National Highway,  
Morbi (Gujarat) India.