

500 M.M
X
500 M.M


HEAVY DUTY OUTDOOR TILES



500x500 M.M




8001

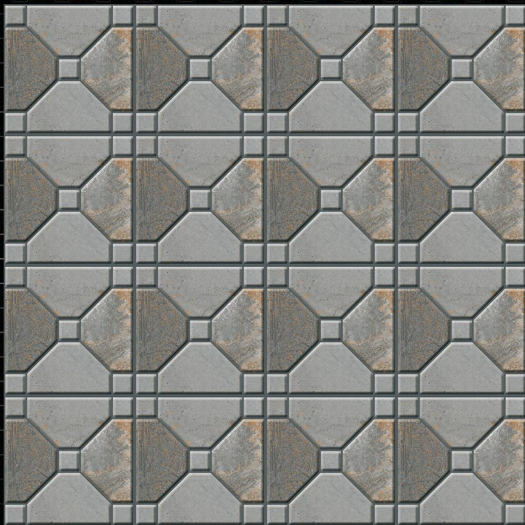


500x500 M.M




8002

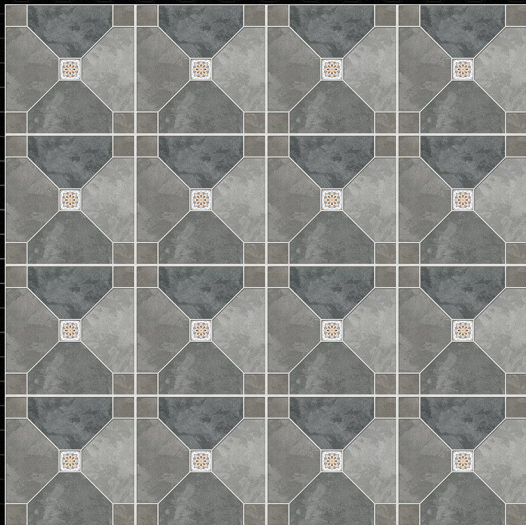

500x500 M.M




8006

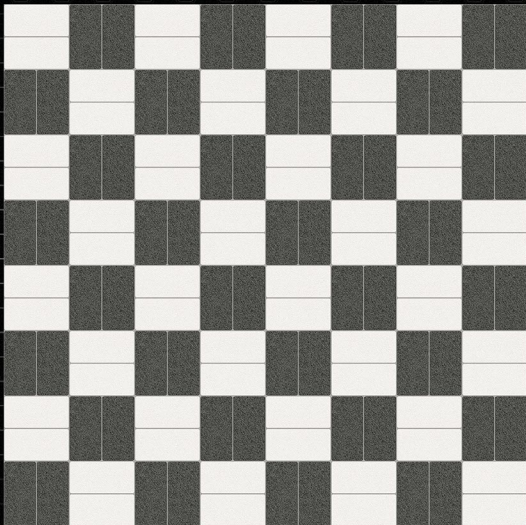

500x500 M.M




8007

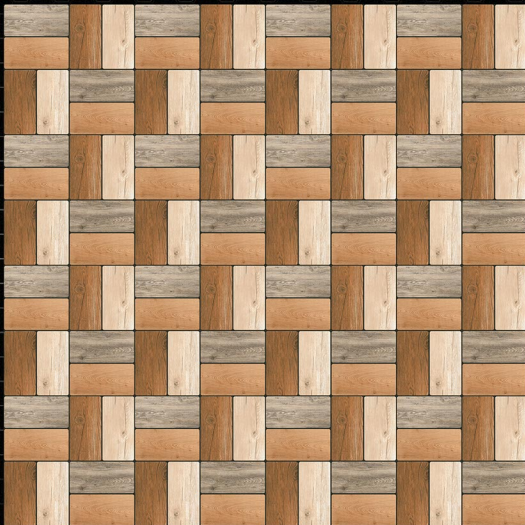

500x500 M.M



8010

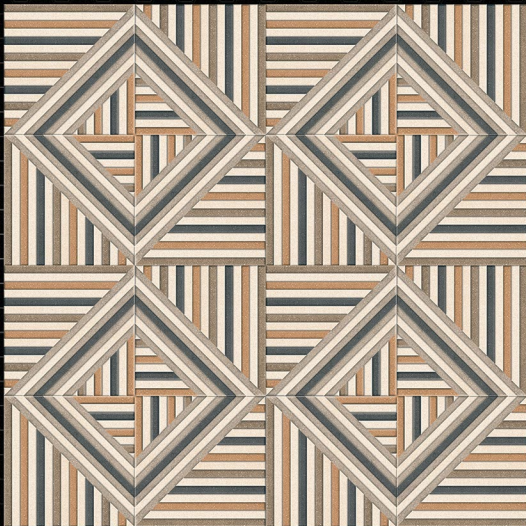

500x500 M.M




8011




500x500 M.M




8013

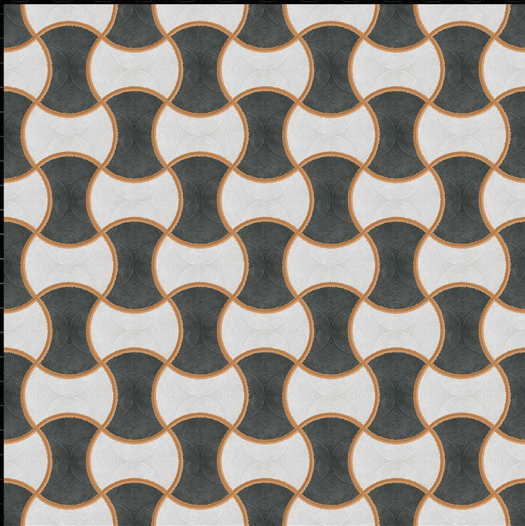

500x500 M.M




8015

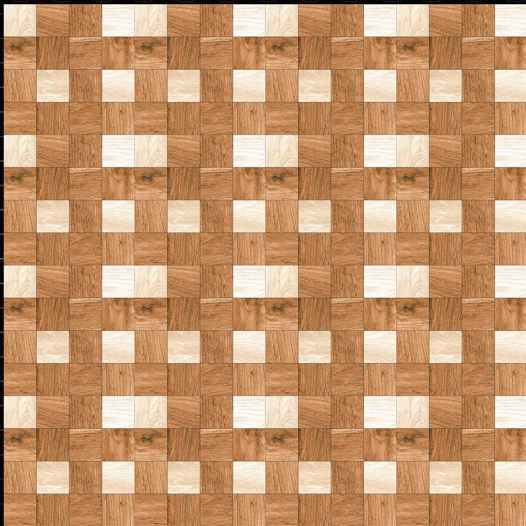


500x500 M.M




8016

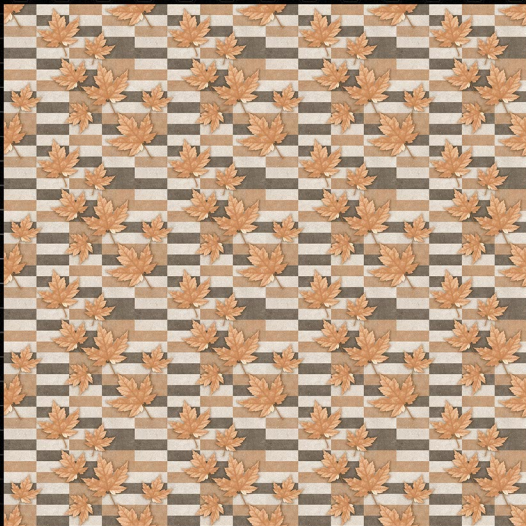

500x500 M.M




8017

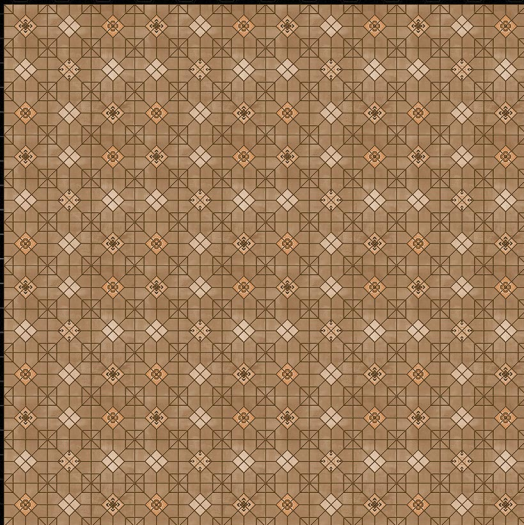


500x500 M.M




8018

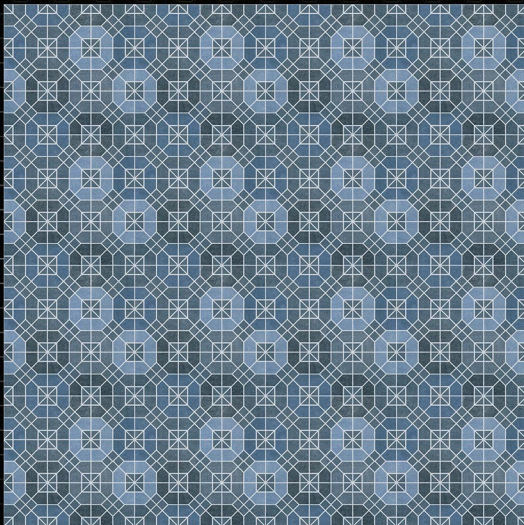

500x500 M.M




8019

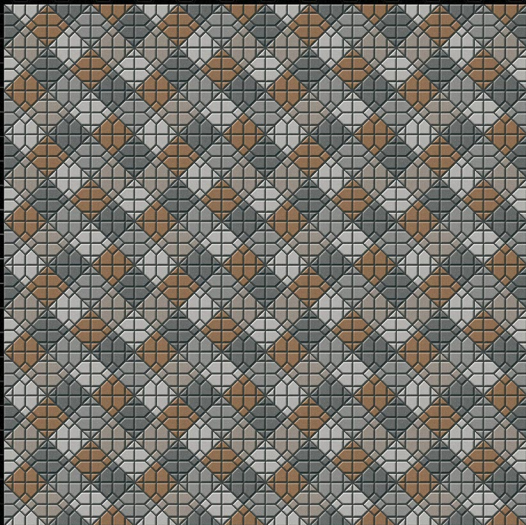

500x500 M.M




8020

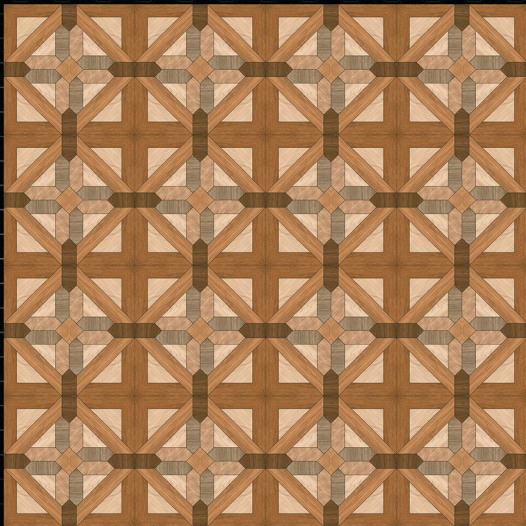

500x500 M.M




8022

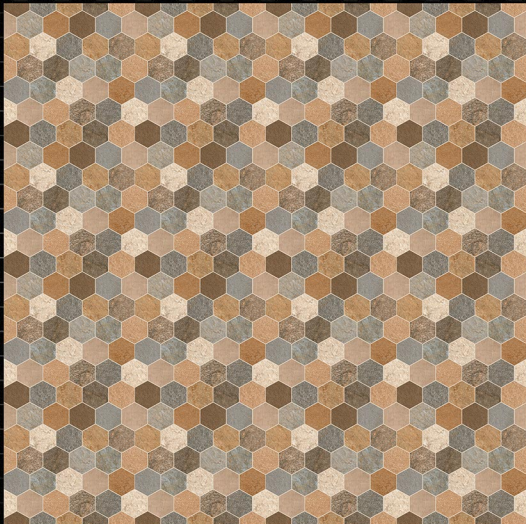


500x500 M.M




8023

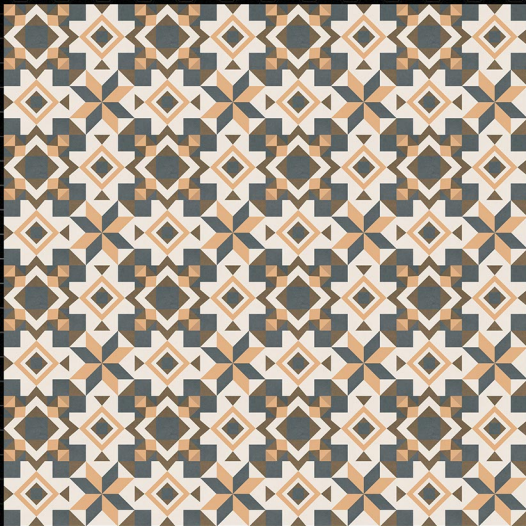


500x500 M.M




8028

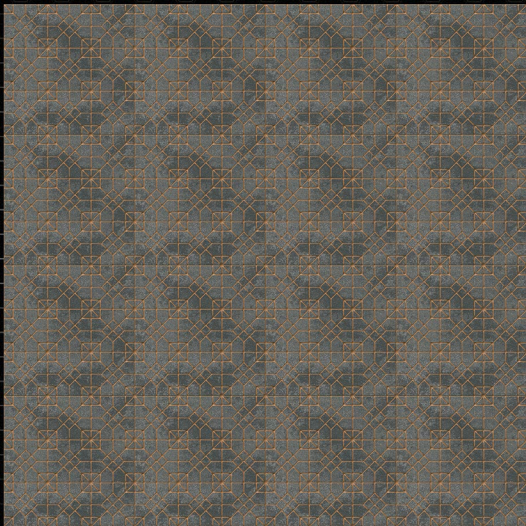


500x500 M.M




8030

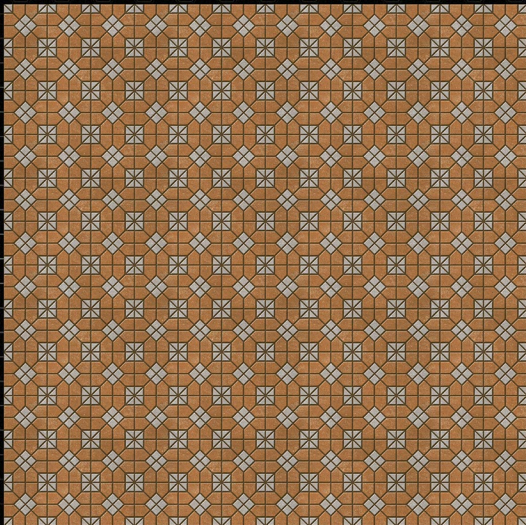

500x500 M.M




8031

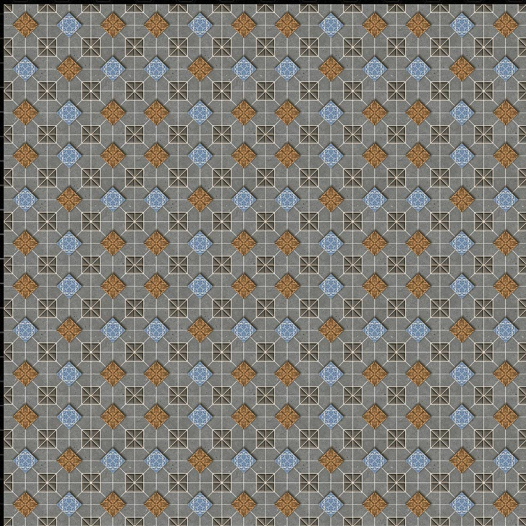

500x500 M.M




8032

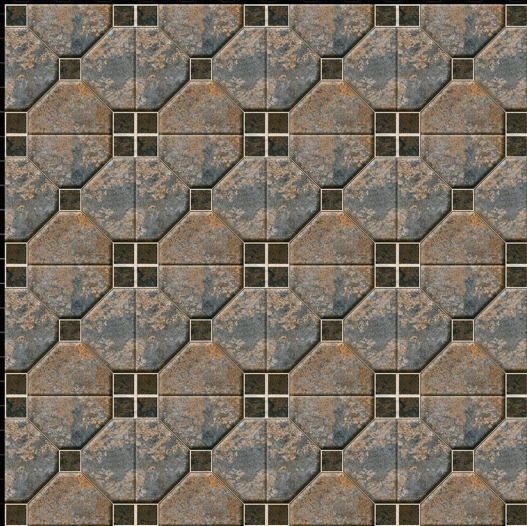

500x500 M.M




8033

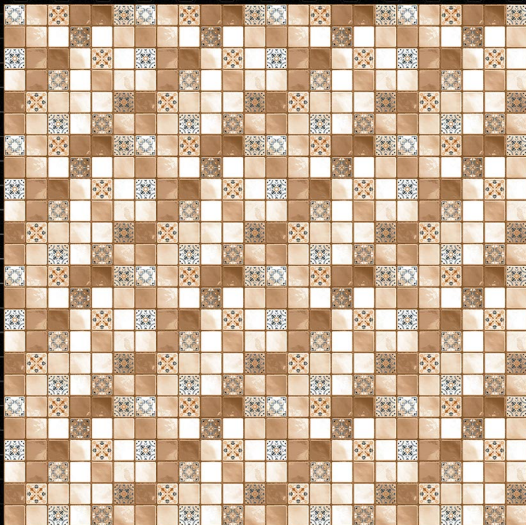


500x500 M.M




8034

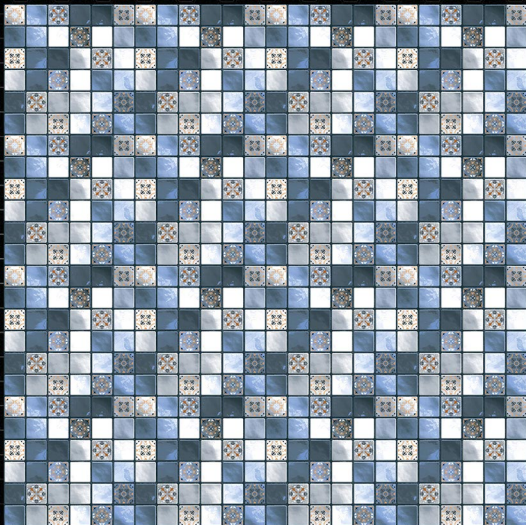


500x500 M.M



8036

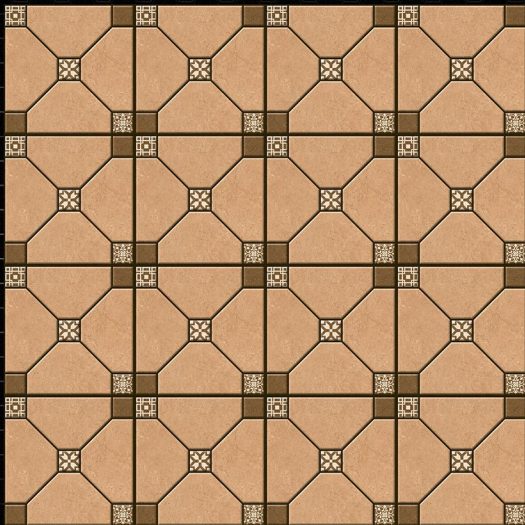


500x500 M.M



9001



500x500 M.M




9003




500x500 M.M




9004

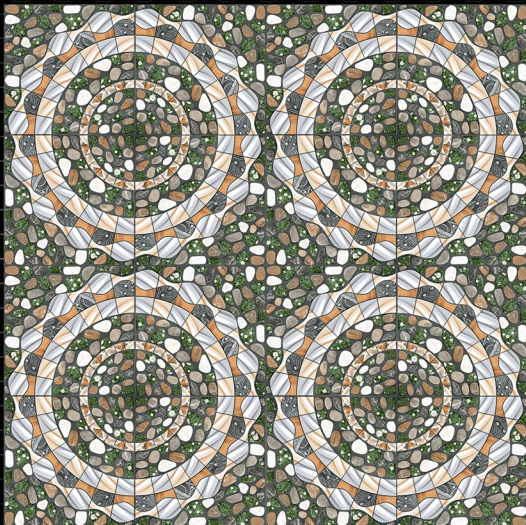


500x500 M.M




9005

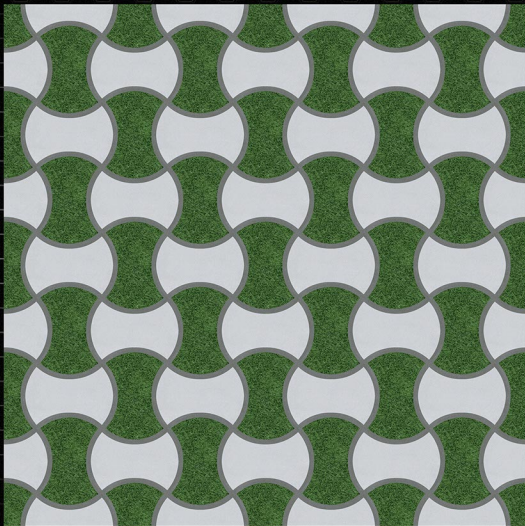

500x500 M.M




9006

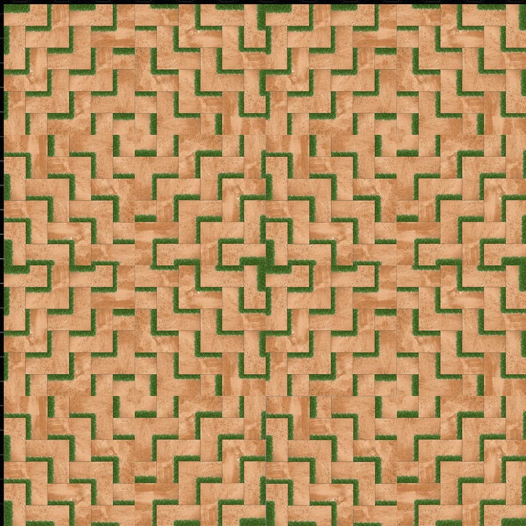

500x500 M.M



9007

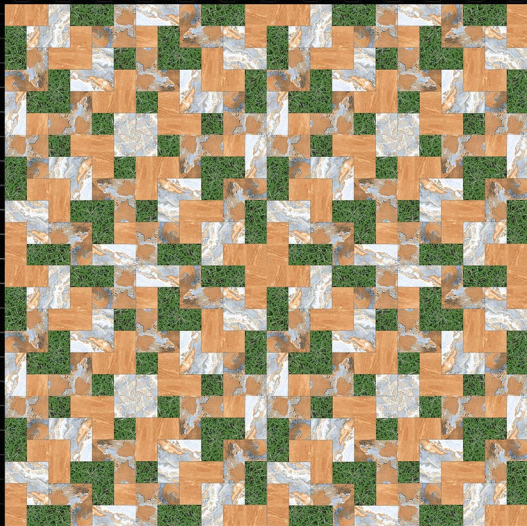

500x500 M.M




9008



500x500 M.M




9009

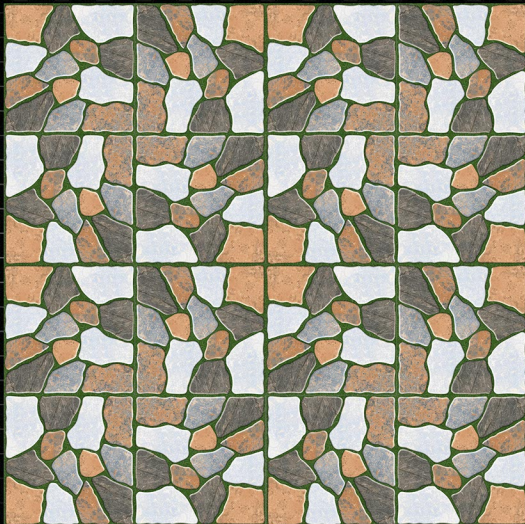


500x500 M.M




9010

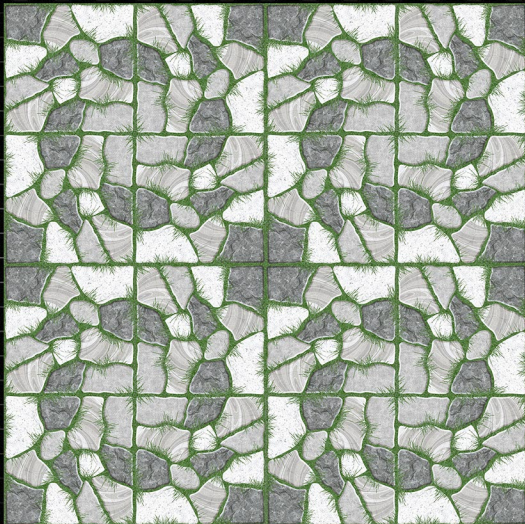


500x500 M.M




9011

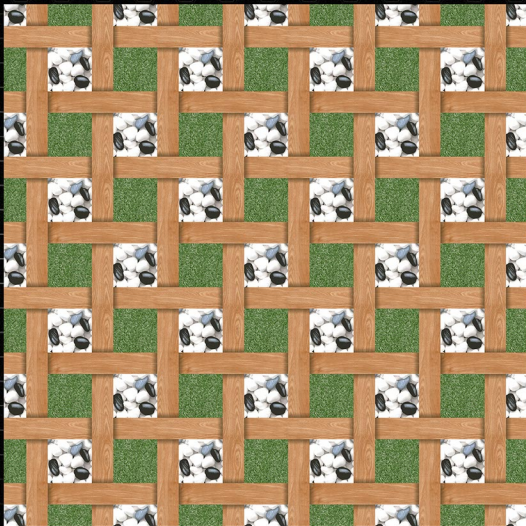

500x500 M.M



9012

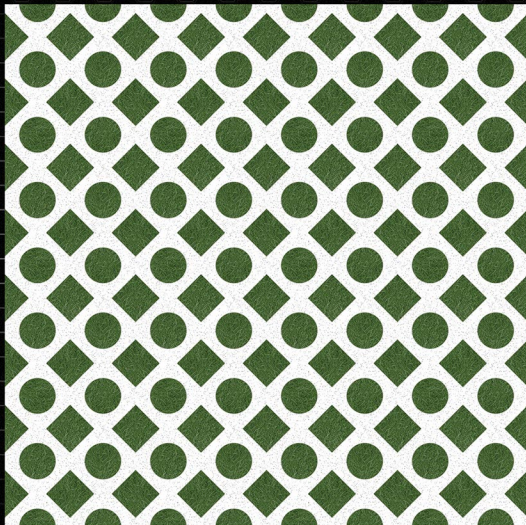

TECHNICAL SPECIFICATION

CHARACTERISTIC		International Std. ISO13006/EN 176 Group Bla	Value	Method of Testing
1.	Deviation in Length	±0.6%	±0.1%	EN 98
2.	Deviation in Thickness	±5%	±4%	EN 98
3.	Straightness of Sides	±0.5%	±0.1%	EN 98
4.	Rectangularity	±0.6%	±0.2%	EN 98
5.	Surface Flatness	±0.5%	±0.3%	EN 98
6.	Water Absorption *	<0.5%	<0.3%	EN 99
7.	Mohs Hardness *	> 6	> 7	EN 101
8.	Flexural Straightness *	> 27 N/mm ²	> 47 N/mm ²	EN 100
9.	Abrasion Resistance	< 204 mm ³	< 98 mm ³	EN 102
10.	Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength *	> 1113 N	> 2830 N	ASTM C-648
12.	Density (g/cc)	> 2	> 2.4	DIN 51082
13.	Frost Resistance	Frost proof	Frost proof	EN 202
14.	Chemical Resistance	No damage	No damage	EN 106
15.	Thermal Shock Resistance	No damage	No damage	EN 104
16.	Colour Resistance	No damage	No damage	DIN 51094
17.	Thermal Expansion	< 9 x 10-6	< 6 x 10-6	EN 103
18.	Stain Resistance	Resistant	Resistant	ISO 10545-14
19.	Moisture Expansion	Nil	Nil	ISO 10545-10
20.	Glossiness	—	Min. 65% - 70% reflection	Glossmeter

Sr.no.	Size	Thickness (Approx)	Tiles Per Box (Approx)	Coverage Area (sq.mtr) (Approx)	Weight (Approx)
1.	Digital 500x500mm	12 mm	4 PCS.	01	24.5 Kgs
1.	Digital 500x500mm	12 mm	3 PCS.	0.75	18.5 Kgs

