


500 M.M
X
500 M.M


HEAVY DUTY OUTDOOR TILES




500x500 M.M




6001

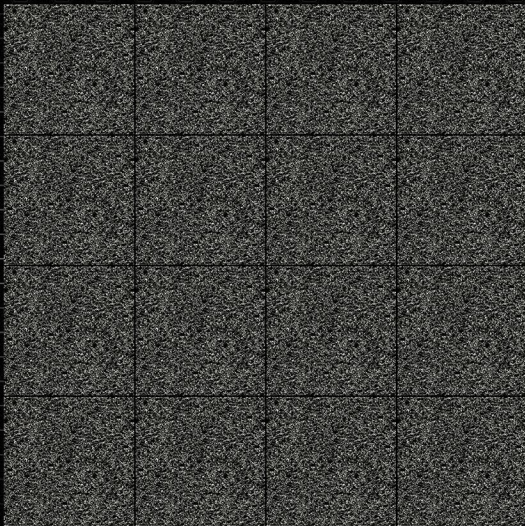


500x500 M.M




6002

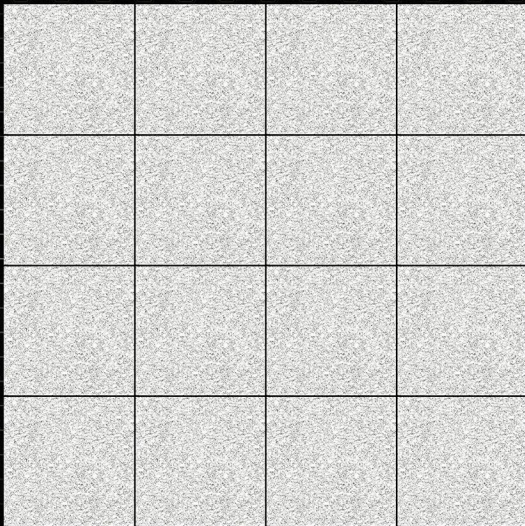


500x500 M.M




6003

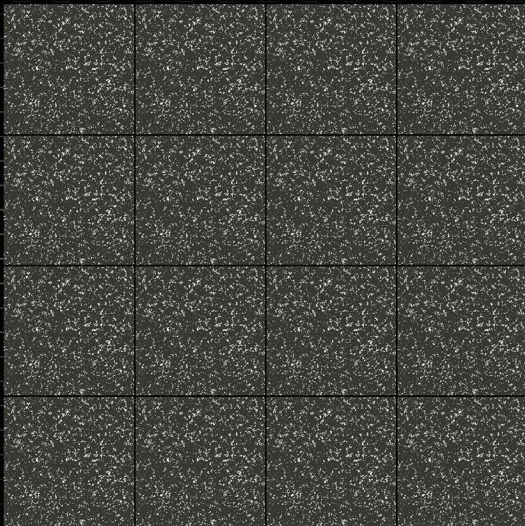


500x500 M.M




6004

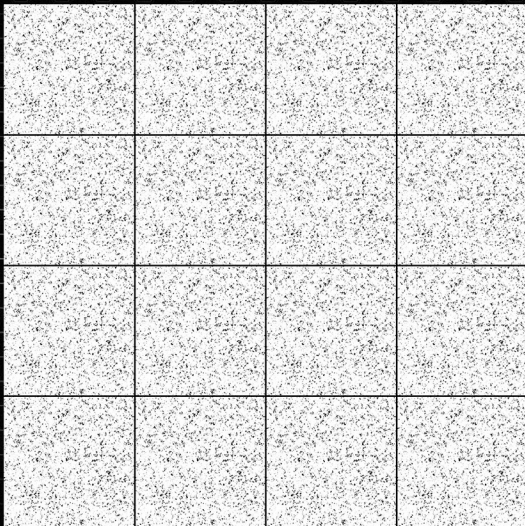


500x500 M.M




6005

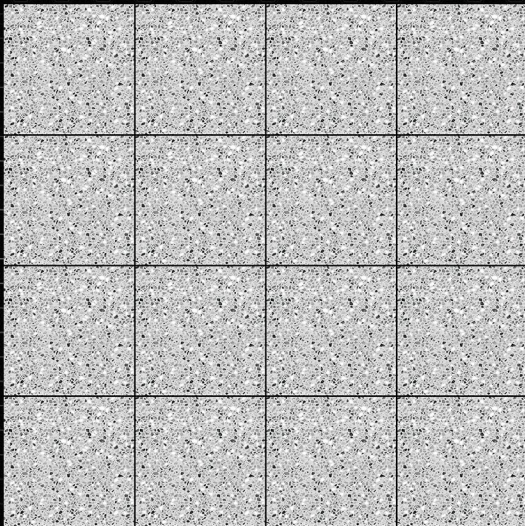


500x500 M.M



6006

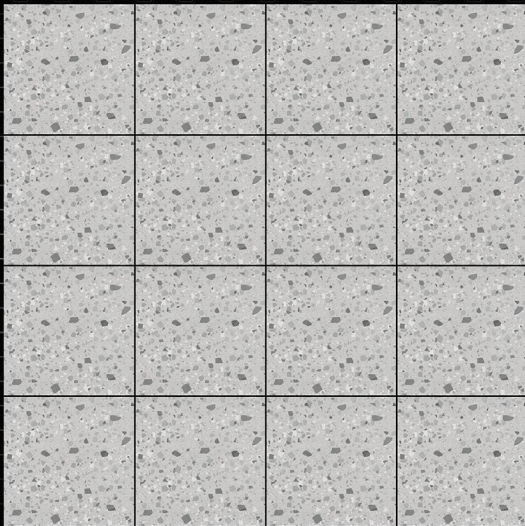

500x500 M.M




6007



500x500 M.M




6008

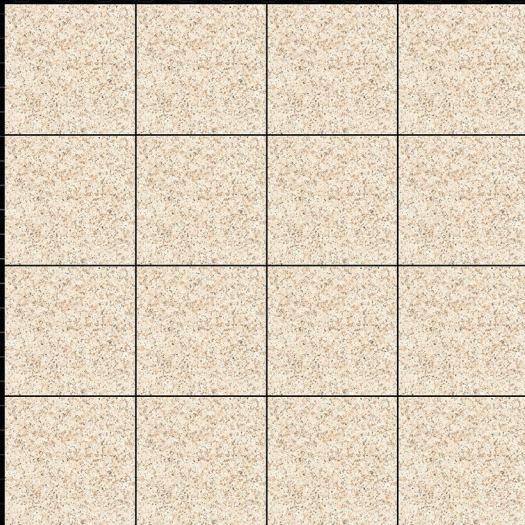

500x500 M.M




6009

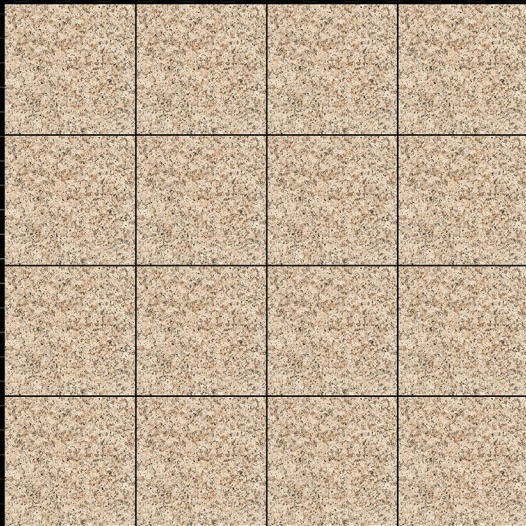

500x500 M.M



6010

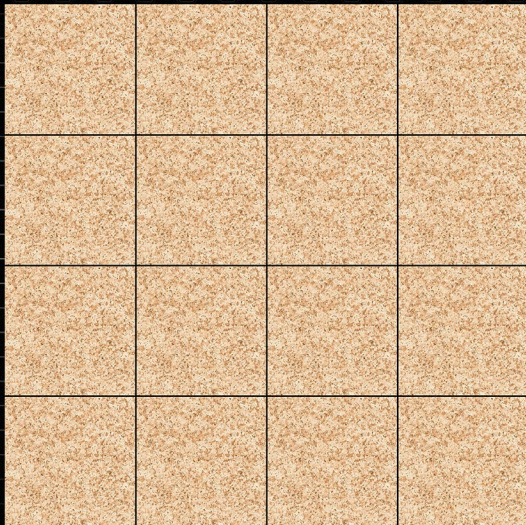


500x500 M.M




6011




500x500 M.M




6012

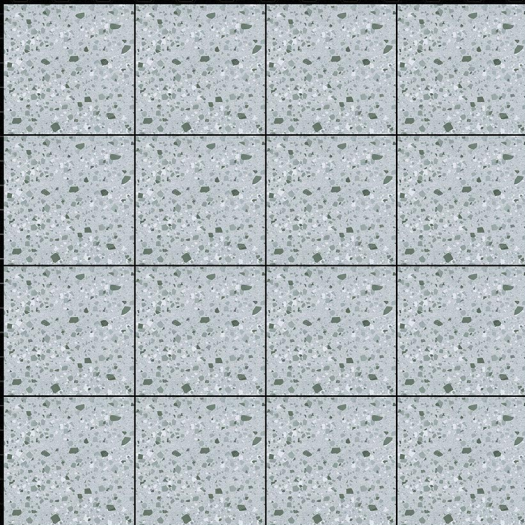

500x500 M.M



6013

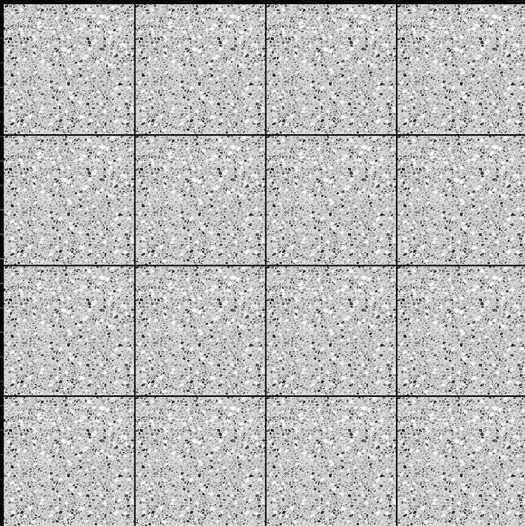

500x500 M.M




6014




500x500 M.M



6015

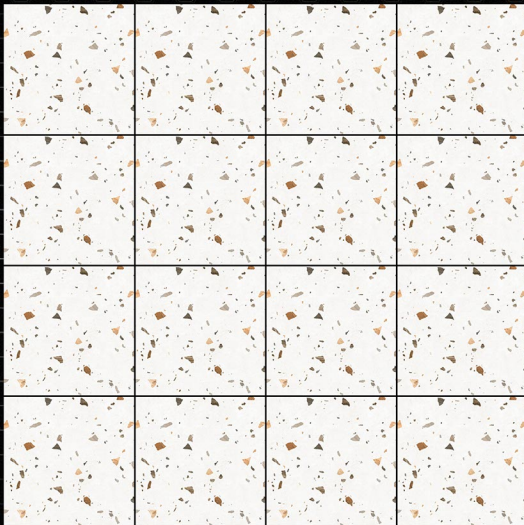

500x500 M.M




6016



500x500 M.M




6017

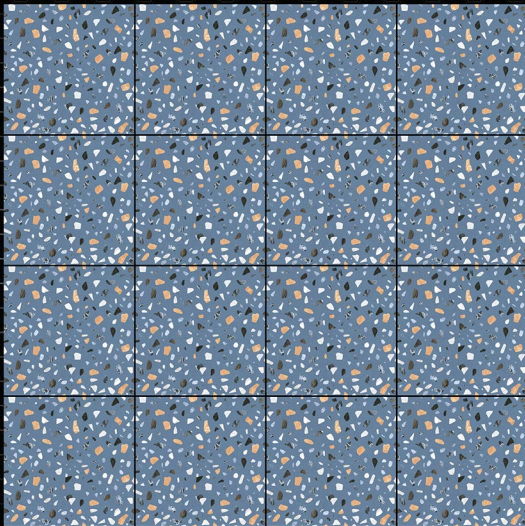


500x500 M.M



6018

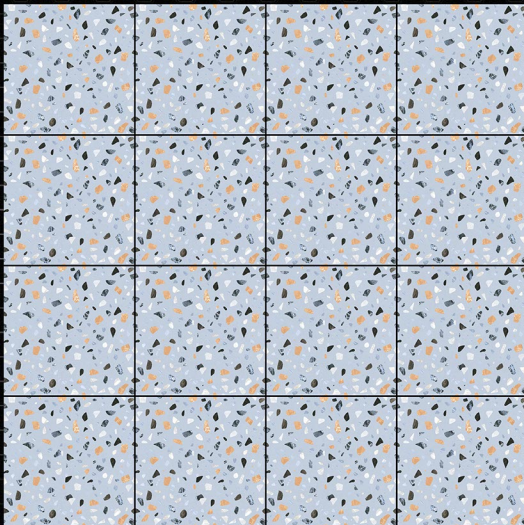


500x500 M.M



6019



500x500 M.M



6020




500x500 M.M




6021




500x500 M.M




6022

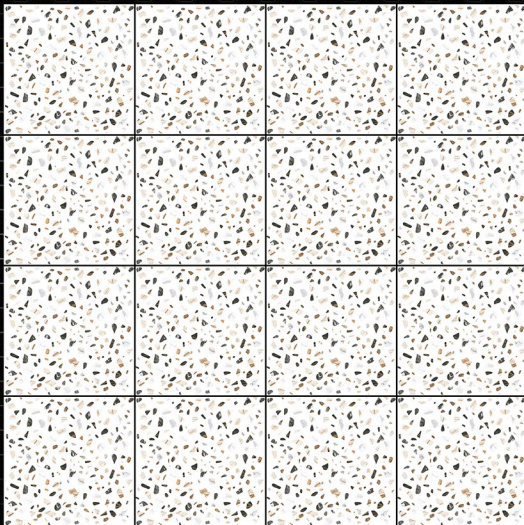

500x500 M.M




6023

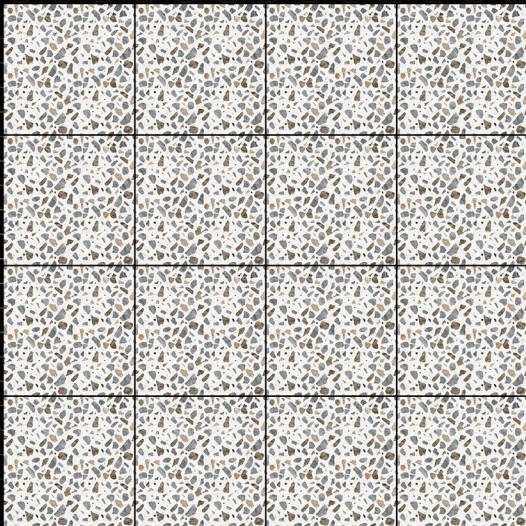

500x500 M.M




6024

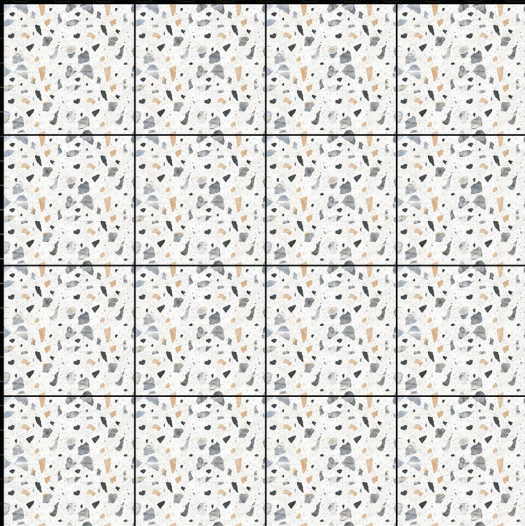


500x500 M.M




6025

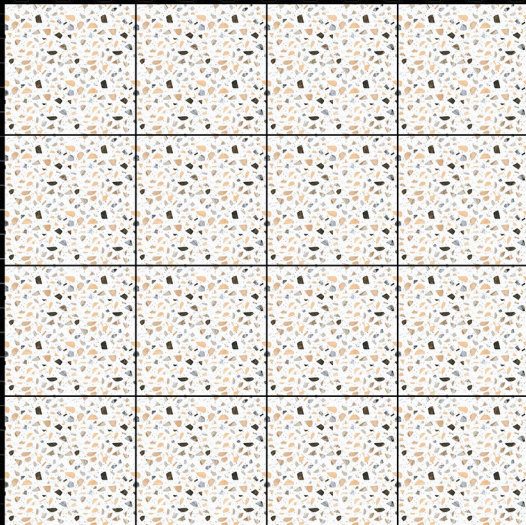


500x500 M.M



6026

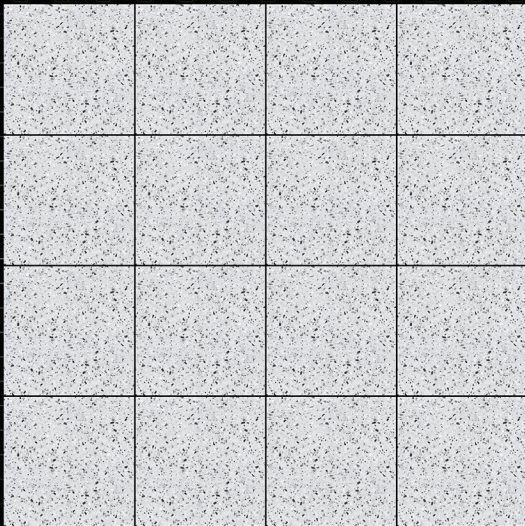


500x500 M.M




6027




500x500 M.M




6028

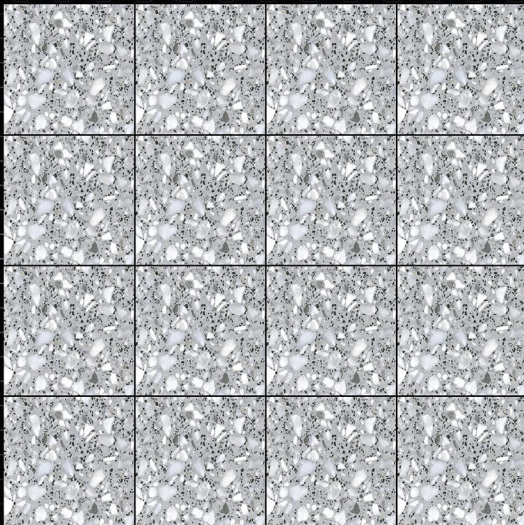


500x500 M.M




6029

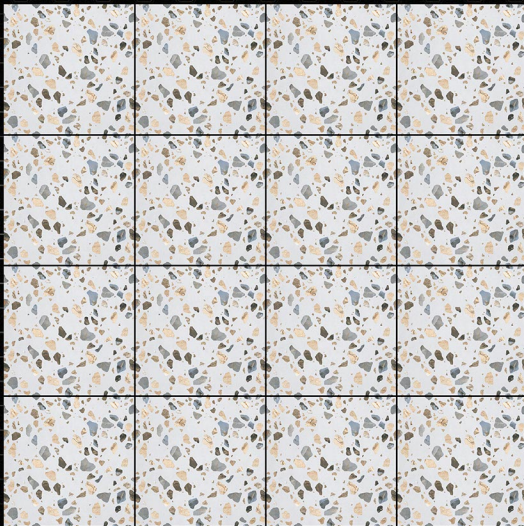


500x500 M.M




6030

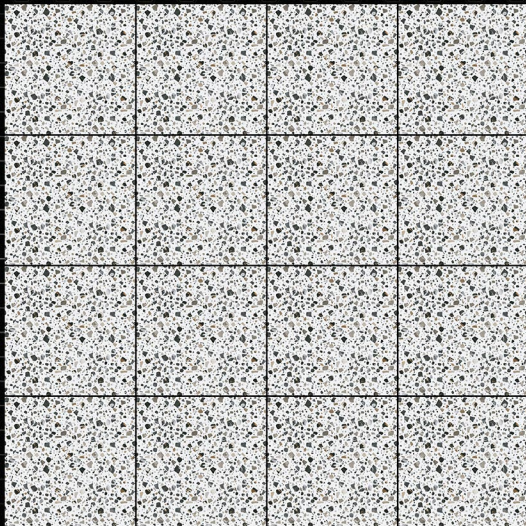

500x500 M.M



6031

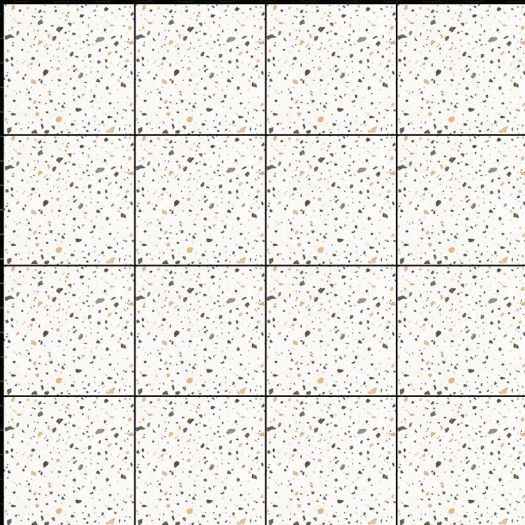

TECHNICAL SPECIFICATION

CHARACTERISTIC		International Std. ISO13006/EN 176 Group Bla	Value	Method of Testing
1.	Deviation in Length	±0.6%	±0.1%	EN 98
2.	Deviation in Thickness	±5%	±4%	EN 98
3.	Straightness of Sides	±0.5%	±0.1%	EN 98
4.	Rectangularity	±0.6%	±0.2%	EN 98
5.	Surface Flatness	±0.5%	±0.3%	EN 98
6.	Water Absorption *	<0.5%	<0.3%	EN 99
7.	Mohs Hardness *	> 6	> 7	EN 101
8.	Flexural Straightness *	> 27 N/mm ²	> 47 N/mm ²	EN 100
9.	Abrasion Resistance	< 204 mm ³	< 98 mm ³	EN 102
10.	Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength *	> 1113 N	> 2830 N	ASTM C-648
12.	Density (g/cc)	> 2	> 2.4	DIN 51082
13.	Frost Resistance	Frost proof	Frost proof	EN 202
14.	Chemical Resistance	No damage	No damage	EN 106
15.	Thermal Shock Resistance	No damage	No damage	EN 104
16.	Colour Resistance	No damage	No damage	DIN 51094
17.	Thermal Expansion	< 9 x 10-6	< 6 x 10-6	EN 103
18.	Stain Resistance	Resistant	Resistant	ISO 10545-14
19.	Moisture Expansion	Nil	Nil	ISO 10545-10
20.	Glossiness	—	Min. 65% - 70% reflection	Glossmeter

Sr.no.	Size	Thickness (Approx)	Tiles Per Box (Approx)	Coverage Area (sq.mtr) (Approx)	Weight (Approx)
1.	Digital 500x500mm	12 mm	4 PCS.	01	24.5 Kgs
1.	Digital 500x500mm	12 mm	3 PCS.	0.75	18.5 Kgs

